



APPLICATION and PERFORMANCE SPECIFICATION

ACT2P32IS120B

- Line Voltage: 120V 60Hz
- Instant Start
- Parallel Lamp Operation
- Passive Power Factor Correction

Lamp Type			Min. Start	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
Type	No.	Watts									
*F32T8	2	32	0/-18	120	0.49	59	30	0.97	1.70	0.87	1.45
F25T8	2	25	0/-18	120	0.41	47	30	0.96	1.70	0.85	1.81
F17T8	2	17	0/-18	120	0.31	33	35	0.90	1.70	0.86	2.59
F40T8	1	40	32/0	120	0.39	45	30	0.96	1.70	1.00	2.22
*F32T8	1	32	0/-18	120	0.34	38	32	0.94	1.70	1.01	2.65

Note: The above data is tested at 60Hz. The lamp with "*" is the main lamp.

Application and Performance Specification Information Subject to Change without Notification.

Performance

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Consumer limits

Safety

- No PCB's
- UL&cUL listed (Class P, Type 1 Outdoor)
- Type HL
- OCV 600V

Application



- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 105°F/40°C
- Maximum Case Temperature: 167°F/75°C
- Sound Rated: A

Physical Parameters

Length	9.5"
Width	1.3"
Height	1.0"
Mounting	8.9"
Weight	1.17bs

Lead Length

White, Black	25" (±1")
Red	46" (±1")
Blue	31" (±1")

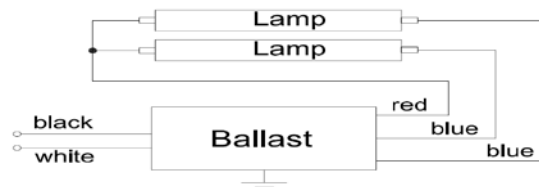

Ballast Case must be ground

Note: For one lamp application, cap any blue lead. Insulate to 600 volts.