



APPLICATION and PERFORMANCE SPECIFICATION

ACT4P32IS120N

- Line Voltage: 120V/60Hz
- Instant Start
- Parallel Lamp Operation
- Normal Power Factor Correction

Lamp Type			Min. Start	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤	BF	BEF
Type	No.	Watts									
*F32T8	4	32	0/-18	120	1.62	103	165	0.50	1.7	0.82	0.80
F25T8	4	25	0/-18	120	1.25	86	170	0.50	1.7	0.86	1.00
F17T8	4	17	0/-18	120	0.97	67	175	0.50	1.7	0.95	1.42
F32T8	3	32	0/-18	120	1.35	86	170	0.50	1.7	0.90	1.04
F40T8	3	40	32/0	120	1.62	101	165	0.50	1.7	0.87	0.86
F25T8	3	25	0/-18	120	1.12	77	175	0.50	1.7	1.00	1.31

Note: The above data is tested at 60Hz. The lamp with "*" is the main lamp.

The ballast BLE can meet DOE energy conservation standards with main lamp.

Application and Performance Specification Information Subject to Change without Notification.

Performance

- Meets Energy Star Version 1.0
- Meets FCC Part 18 (Class B) for EMI

Safety

- No PCB's
- UL&cUL listed (Class P, Type 1 Outdoor)
- Type HL
- OCV 600V

Application


- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 105°F/40°C
- Maximum Case Temperature: 167°F/75°C
- Sound Rated: A

Physical Parameters

Length	9.5"(242.0mm)
Width	1.3"(33.3mm)
Height	1.1"(28.0mm)
Mounting	9.5" (226.0mm)
Weight	1.09 lbs(496g)

Lead Length

White, Black	25"(635mm) ±1"
Yellow	46"(1168mm) ±1"
Blue, Red	31"(787mm) ±1"

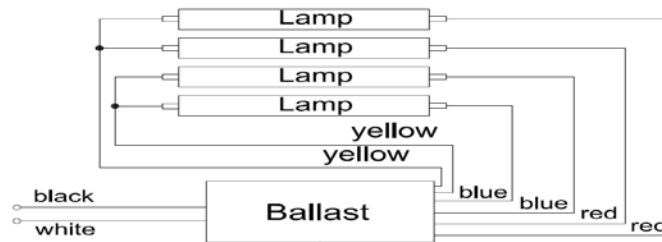

! Ballast Case must be ground