



APPLICATION and PERFORMANCE SPECIFICATION

ACT1P800PSUNV

- Line Voltage: 120-277V 50/60Hz
- Program Start
- Active Power Factor Correction
- Lamp End of Life Protection
- Type CC

Lamp Type			Min. Start Temp. (F/C)	Vin (V)	Iin (A)	Pin (W)	ATHD ≤%	PF ≥	CF ≤
Type	No.	Watts							
* GTD 40 V0	1	110	-20/-30	120	0.85	103	10	0.95	1.7
GTD 34 V0	1	100	-20/-30	120	0.72	87	10	0.95	1.7
GTD 28 V0	1	86	-20/-30	120	0.61	74	10	0.95	1.7
GTD 22 V0	1	72	-20/-30	120	0.47	57	10	0.95	1.7
GTD 16 V0	1	55	-20/-30	120	0.31	37	10	0.95	1.7
* F95T5/HO	1	95	-20/-30	120	0.91	109	10	0.95	1.7
* GTD 40 V0	1	110	-20/-30	277	0.36	99	10	0.95	1.7
GTD 34 V0	1	100	-20/-30	277	0.31	85	10	0.95	1.7
GTD 28 V0	1	86	-20/-30	277	0.27	72	10	0.95	1.7
GTD 22 V0	1	72	-20/-30	277	0.21	56	11	0.95	1.7
GTD 16 V0	1	55	-20/-30	277	0.15	38	13	0.95	1.7
* F95T5/HO	1	95	-20/-30	277	0.39	107	10	0.95	1.7

Note: the above data is tested at 60Hz. Application and Performance Specification Information Subject to Change without Notification.

Performance

- Meets ANSI Standard C82.11-2005
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non CONSUMER Limits

Safety


- No PCB's, Type HL
- UL listed (Class P, Type 1 Outdoor)
- OCV 300V
- No-load: 5 Watt

Application

- Maximum Ambient Temperature: 131°F, 55°C
- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Sound Rated: A
- Maximum case temperature: 167°F, 75°C

Physical Parameters

- Length * Width * Height 9.75" * 1.5" * 1.2"
- Mounting 8.9"
- Weight 1.22 lbs
- White, Black 25"(±1")
- Red/ Blue 31"(±1")

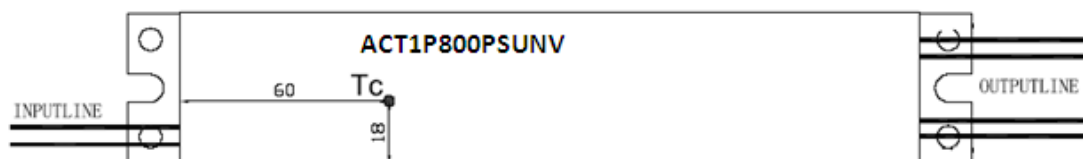



APPLICATION and PERFORMANCE SPECIFICATION

