



APPLICATION and PERFORMANCE SPECIFICATION

ACT2P32IS347L

- Line Voltage:347V 50/60Hz
- Instant Start
- Parallel Lamp Operation
- Active Power Factor Correction

Lamp Type			Min. Start	Vin	Iin	Pin	ATHD	PF	CF	BF	BEF
Type	No.	Watts	Temp. (F/C)	(V)	(A)	(W)	≤%	≥	≤		
* F32T8	2	32	0/-18	347	0.163	54	10	0.98	1.70	0.80	1.60
FB32T8	2	32	0/-18	347	0.156	53	10	0.98	1.70	0.80	1.60
FB31T8	2	31	0/-18	347	0.150	51	10	0.98	1.70	0.81	1.63
FB28T8	2	28	0/-18	347	0.136	46	10	0.98	1.70	0.83	1.80
F32T8/ES/30	2	30	0/-18	347	0.147	50	10	0.98	1.70	0.83	1.66
F32T8/ES/28	2	28	0/-18	347	0.136	46	10	0.98	1.70	0.83	1.80
F32T8/ES/25	2	25	0/-18	347	0.131	44	10	0.98	1.70	0.83	1.87
F25T8	2	25	0/-18	347	0.125	43	10	0.97	1.70	0.84	1.95
F17T8	2	17	0/-18	347	0.094	32	10	0.97	1.70	0.88	2.75
F32T8	1	32	0/-18	347	0.107	36	10	0.97	1.70	0.88	2.45
FB32T8	1	32	0/-18	347	0.103	34	10	0.97	1.70	0.88	2.59
FB31T8	1	31	0/-18	347	0.100	33	10	0.97	1.70	0.88	2.67
FB28T8	1	28	0/-18	347	0.092	30	10	0.97	1.70	0.88	2.93
F32T8/ES/30	1	30	0/-18	347	0.098	33	10	0.97	1.70	0.88	2.67
F32T8/ES/28	1	28	0/-18	347	0.090	30	10	0.96	1.70	0.88	2.93
F32T8/ES/25	1	25	0/-18	347	0.088	29	10	0.96	1.70	0.88	3.03
F25T8	1	25	0/-18	347	0.085	28	10	0.96	1.70	0.89	3.07

Note: The above data is tested at 60Hz.

The lamp with “*” is the main lamp.

Application and Performance Specification Information Subject to Change without Notification.

Performance

- Meets ANSI Standard C82.11-2002
- Meets ANSI Standard C62.41-2002
- Meets FCC 18 Non-Consumer limits

Safety

- No PCB's,
- UL&cUL listed (Class P, Type 1 Outdoor)
- OCV 600V

Application

- Remote Mounting: 18 ft. max. Lead length, 18AWG
- Maximum Ambient Temperature: 131°F, 55°C
- Sound Rated: A
- Maximum case temperature Tc: 194°F, 90°C

Physical Parameters



Length	9.5"
Width	1.3"
Height	1.1"
Mounting	8.9"
Weight	0.8 lbs

Lead Length

White, Black	25"(±1")
Red	46"(±1")
Blue	31"(±1")



APPLICATION and PERFORMANCE SPECIFICATION

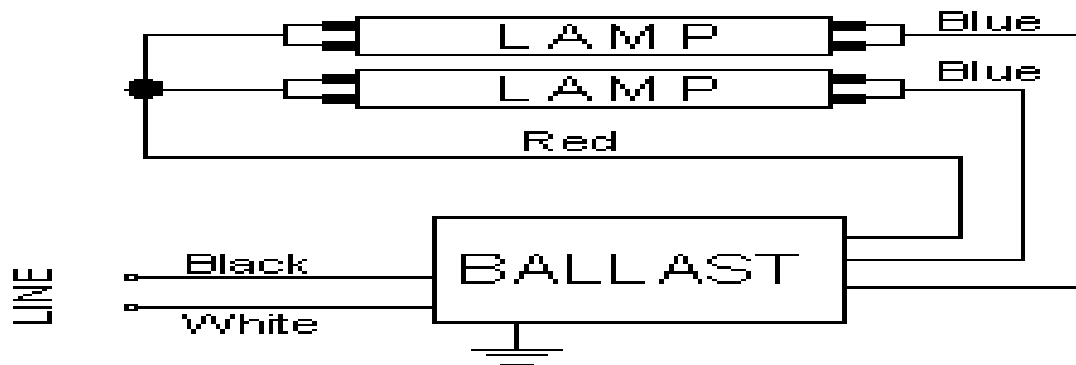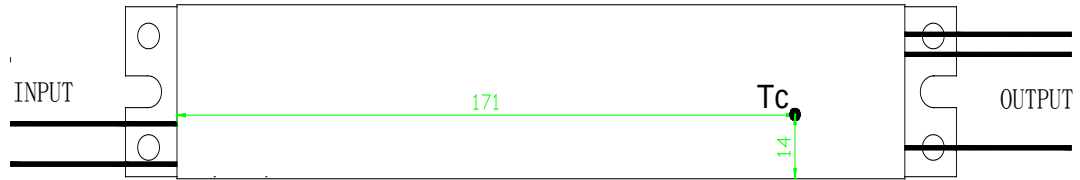

Note: For one lamp application, cap any blue lead. Insulate to 600 volts.